


## **Salient Details**

### **CWSS to Vilangudi RTP and Samayanallur village panchayat**

- 1. Scheme Cost** : Rs. 355.42 Lakhs.
- 2. Beneficiaries** : Town Panchayat – 1 No.  
Habitation - 1No.
- 3. Population** : 30570
- 4. Designed Qty** : 1.90 mld
- 5. Head Works**
- a. Source** : River Vaigai  
Infiltration wells – 6 Nos.
- b. Pumpset** : 5 HP Submersible - 342 lpm X 18m  
(In each well with one No. Standby)
- c. Sump** : 2 Lakh Lit.
- d. Main Pumpset**
- For Vilangudi** : 20 HP Submersible-1711lpm X 28m-2 Nos.  
(One No. Standby)
- For Samayanallur** : 5 HP Submersible-339lpm X 39m-2 Nos.  
(One No. Standby)
- 6. Hours of Pumping** : 16 hours
- 7. Pumping main**
- a. To Vilangudi** : 15165 m
- b. To Samayanallur** : 8715 m

**8. Service Reservoirs** : Existing - 9 Nos.  
New - 6 Nos.

# விளாங்குடி பேரூராட்சி மற்றும் சமயநல்லூர் ஊராட்சி கூட்டு குடிநீர்த்திட்டம்

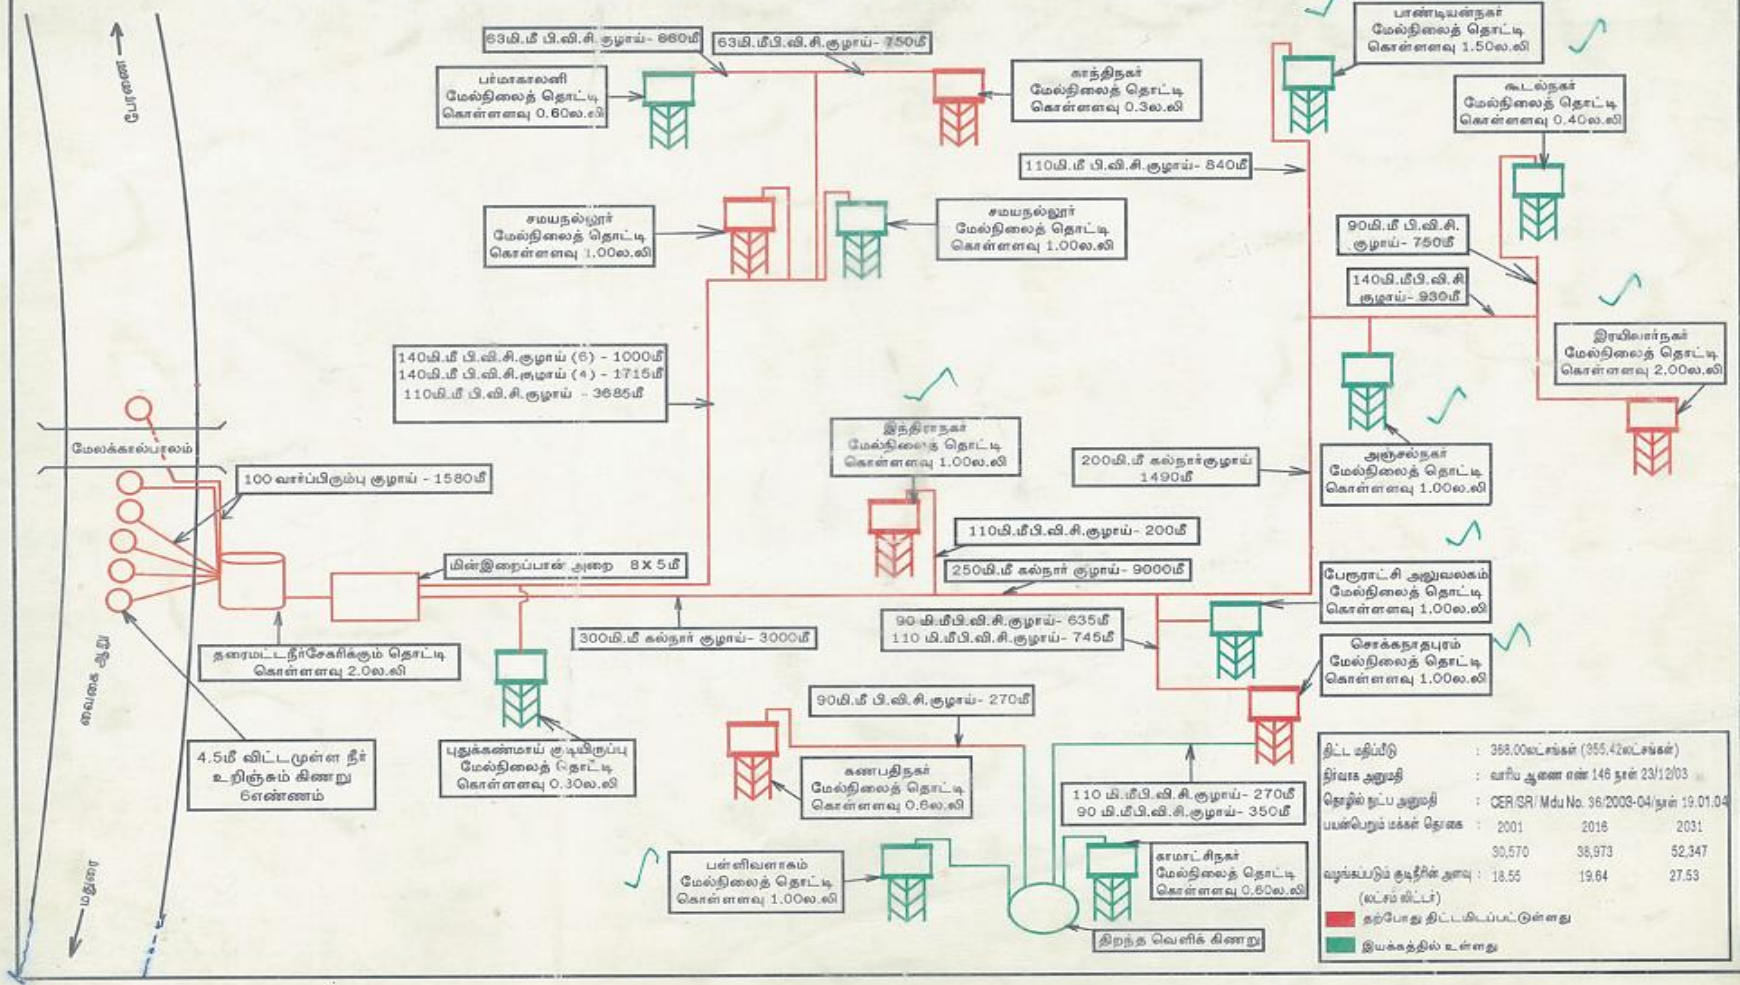

திட்ட மதிப்பீடு	: 368,00௦௦௦௦ (365,42௦௦௦௦)
நிர்வாக அலுவலர்	: வரிசை ஆணை எண் 146 நாள் 23/12/03
தொழில் நுட்ப அலுவலர்	: CER/SR/ Mdu No. 36/2003-04/நாள் 19.01.04
பயன்பெறும் மகன் தொகை	: 2001 2016 2031
	: 30,570 38,973 52,347
வழங்கப்படும் குடிநீரின் அளவு	: 18.55 19.64 27.53
(லட்சம் லிட்டர்)	
தற்போது திட்டமிடப்படும்பகுதி	
இயக்கத்தில் உள்ளது	